


# 8-Port Telephone Resi Module with RJ31X Jack

## PRODUCT SPECIFICATION

### Package includes:

- A. 8-Port Telephone Module with RJ31X Jack, 1 pc
- B. Bracket, 1 pc
- C. Locking Button, 4 pcs
- D. Warning Label, 1 pc
- E. Installation Instructions, 1 sheet

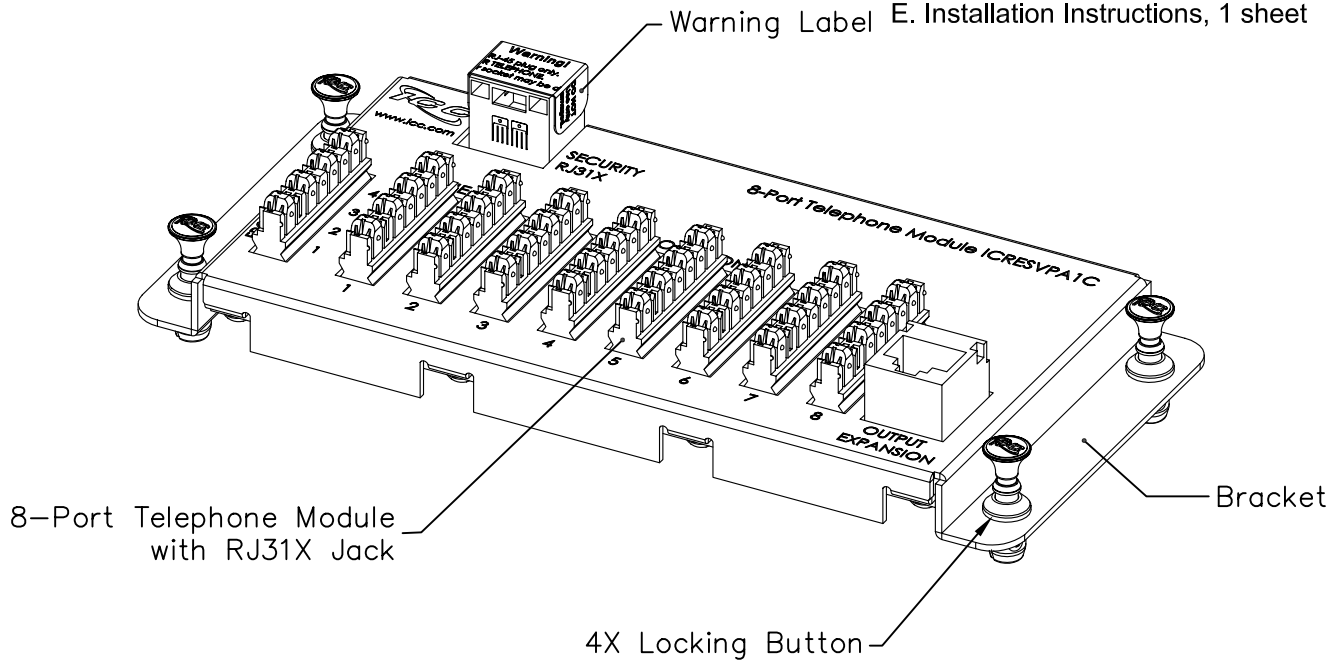

### Features and Benefits:




- Designed to support up to 4 incoming telephone lines with 8 outputs/extensions per line
- Module is bridged as using only 2 incoming lines can get 16 outputs/extensions per line and using only 1 incoming line can get 32 outputs/extensions
- Includes an RJ31X jack connected to line 1 for a security system
- Includes an expansion jack for more outputs/extensions by connecting to ICRESVPB10 8-port telephone resi module with expansion jacks
- Fits all ICRESDC 14", 21", 28", and 42" resi distribution center enclosures with the 4 locking buttons
- Installation instructions #MSR-0411-3 included
- UL listed

### RESI MODULE, TELEPHONE, 8-PORT W/ RJ31X

ITEM NO.	ICRESVPA1C	REV.	C
DWG NO.	PSRESVPA1C	PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com

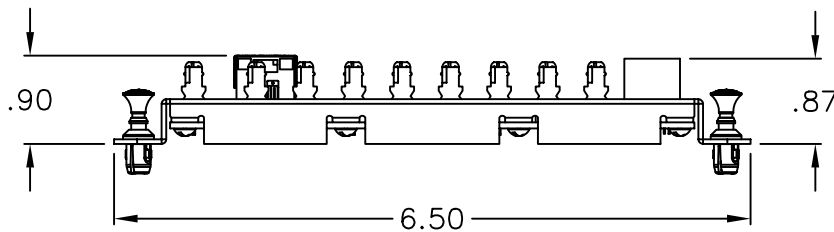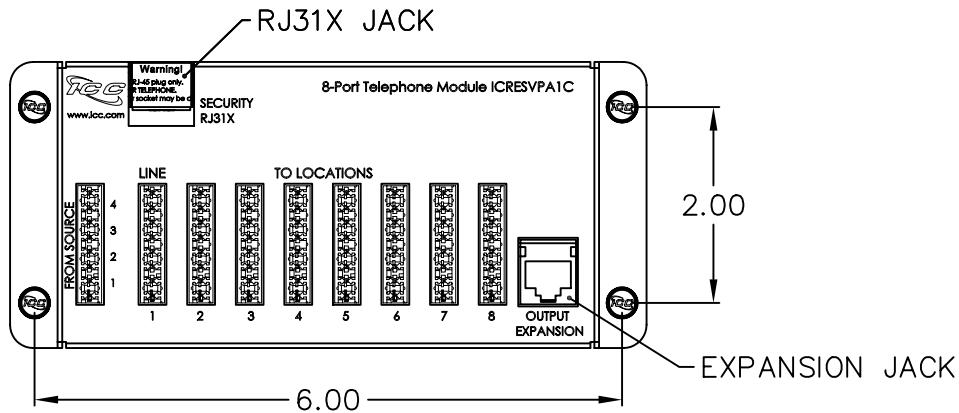

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. 8-PORT TELEPHONE MODULE WITH RJ31X JACK:
  - A. PCB: GLASS EPOXY FR-4 COPPER CLAD, t=1.20mm
  - B. 110 BLOCK:
    - HOUSING: PC, UL 94V-0
    - IDC: PHOSPHOROUS BRONZE, TIN PLATED
  - C. RJ45 & RJ31X JACK/SOCKET:
    - HOUSING: PBT + 15% FIBER GLASS
    - CONTACT: PHOSPHOROUS BRONZE, 50u" GOLD PLATED
  - D. WIRING IN ACCORDANCE TO T568B
2. BRACKET:
  - A. MATERIAL: 18 GA CRS
  - B. SURFACE FINISH: WHITE POWDER COAT
3. LOCKING BUTTON: MATERIAL: NYLON 6/6, UL 94V-0

UL US FILE NO. 125268

<b>RESI MODULE, TELEPHONE, 8-PORT W/ RJ31X</b>			
ITEM NO.	ICRESVPA1C		REV. C
DWG NO.	PSRESVPA1C		PAGE NO. 2

CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com