

AVC-LA92SVT

ALL-IN-ONE HOUSING CAMERA

ALL-IN-ONE
CAMERA





FUNCTION

- ALL-IN-ONE (HD-TVI / EX SDI&HD SDI / ANALOG)
- 1/2.9" 2.4MEGAPIXEL SONY EXMOR CMOS
- 5.0~50mm VARIFOCAL DC IRIS MEGAPIXEL LENS (ICR)
- 60 IR LED'S + 2 HI-INTENSITY IR LED'S
- 0.02Lux (SENS-UP X 32)
- ULTRA HI-INTENSITY HIGH POWER LED
- WDR (WIDE DYNAMIC RANGE)
- 3DNR (NOISE REDUCTION)
- IP66 RATED
- DC 12V(±10%) / AC 24V(±10%)
- ICR FILTER CHANGE FUNCTION



DIMENSION

* Unit : mm (Inch)

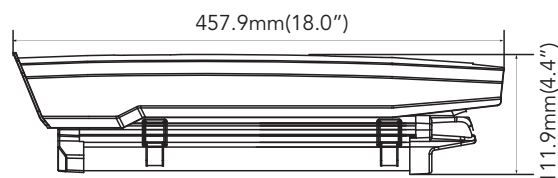

SPECIFICATION

DESCRIPTION	NTSC	PAL
IMAGE SENSOR	1/2.9" 2.4MEGAPIXEL SONY EXMOR CMOS	
EFFECTIVE PIXEL	1920 (H) × 1080 (V) = 2.4M	
SCANNING SYSTEM	PROGRESSIVE	
SYNCHRONIZATION	INTERNAL	
HORIZONTAL RESOLUTION	1080P HD	
VIDEO OUTPUT	HD-TVI, EX-SDI/HD-SDI, CVBS (OSD SELECTABLE)	
S/N (Y SIGNAL)	MORE THAN 52dB	
MIN. ILLUMINATION	0.02Lux (SENS-UP X 32)	
IRIS ADJUSTMENT	ALC / ELC	
LENS	5.0~50mm MP DC AUTO IRIS VARIFOCAL LENS (ICR)	
ELECTRONIC SHUTTER	AUTO (1/30~1/60,000)	AUTO (1/25~1/60,000) FLK
OSD LANGUAGE	ENG / CHN / CHN[S] / JPN / KOR	
BACKLIGHT COMPENSATION	OFF / HLC / BLC / WDR	
DAY & NIGHT	COLOR / BW / EXTERN / AUTO	
WDR	OFF / LOW / MIDDLE / HIGH	
AUTO GAIN CONTROL	LEVEL (0~20) ADJUSTMENT	
WHITE BALANCE	AUTO / AUTODEXT / PRESET / MANUAL	
PRIVACY MASKING	ON / OFF (PROGRAMMABLE 16 ZONES)	
DNR	OFF / LOW / MIDDLE / HIGH	
SMART IR (ANTI-SAT)	ANTI-SET (0~20) ADJUSTMENT	
LSC	ON / OFF	
GAMMA	0.45 / 0.5 / 0.55 / 0.6 / 0.65	
DEFOG	ON / OFF	
DIGITAL ZOOM	ON / OFF (X1 ~ X8.0)	
DEAD PIXEL COMPENSATION	LIVE DPC / DPC SET	
SENS-UP	OFF / X2~X32	
MOTION	4 AREA	
DIGITAL EFFECT	OFF / V-FLIP / MIRROR / ROTATE	
COMMUNICATION	UTC	
IR LED	60 IR LED'S + 2 HI-INTENSITY IR LED'S	
INPUT VOLTAGE	DC 12V / AC 24V DUAL VOLTAGE	
POWER CONSUMPTION	DC IR OFF : 210mA (MAX) / DC IR ON : 650mA (MAX) AC IR OFF : 200mA (MAX) / AC IR ON : 550mA (MAX)	
OPERATING TEMP. / HUM.	-22°F ~ 122°F / MAX 90% RH	
STORAGE TEMP. / HUM.	-20°C ~ +60°C / MAX 90% RH	