

www.GESecurity.com

1085 Series Surface Mount Magnetic Contacts

Surface screw mount contacts with wire leads

Overview

The GE Security 1085 Series surface mount magnetic contacts are designed for use in installations where a small, sealed unit is required. The reed switch is totally encapsulated in GE Security's exclusive polyurethane potting compound preventing moisture from entering the switch and causing false alarms.

The 5/8-inch standard gap distance allows for fast, easy installation and prevents false alarms from loose fitting doors. Recessed mounting holes make for clean-looking installations. Wide gap models are available.



Standard Features

- **Sealed switch assembly**
- **Wide gap distance allows for fast set-up, easy installation**
- **Mounting screws included**

1085 Series Surface Mount Magnetic Contacts

Surface screw mount contacts with wire leads

Specifications

Electrical, 1085

- Voltage: 100 VAC/DC max.
- Current: 0.5 A max.
- Power: 7.5 W max.

Electrical, 1086

- Voltage: 30 VAC/DC max.
- Current: 0.25 A max.
- Power: 3.0 W max.

Features, 1085

- Loop type: Closed
- Electrical configuration: Normally open
- Lead type: 1 ft. #22 wire

Features, 1086

- Loop type: Open
- Electrical configuration: Normally closed
- Lead type: 1 ft. #22 wire


Physical

- Dimensions (LxWxD): 2.0 x 0.375 x 0.375 in. (51 x 9.5 x 9.5 mm)
- Mounting holes: On 1.625 in. (41 mm) centers
- Gap distance, 1085: Up to 5/8 in.
- Gap distance, 1085W: Up to 1-1/2 in.

Regulatory

- C-UL-US (UL only for 1086)

Related Diagram

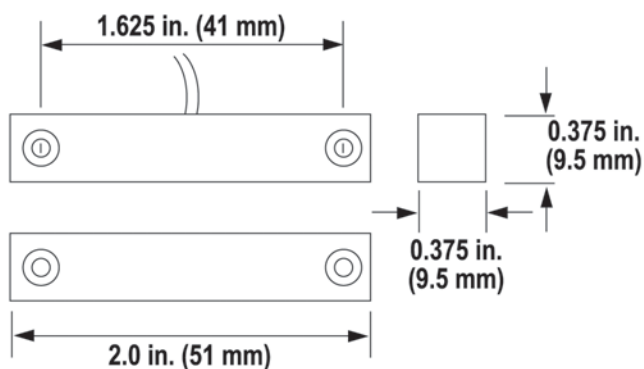

Ordering Information

1085-N	Surface screw mount magnetic contact with leads, 5/8 in. gap size, white
1085-M	Surface screw mount magnetic contact with leads, 5/8 in. gap size, mahogany brown
1085W-N	Surface screw mount magnetic contact with leads, wide gap, 1-1/2 in. gap size, white
1085W-M	Surface screw mount magnetic contact with leads, wide gap, 1-1/2 in. gap size, mahogany brown
1086-N	Surface screw mount terminal magnetic contact, open loop, white
1086W-M	Surface screw mount terminal magnetic contact, wide gap, open loop, mahogany brown
1081-N	Magnet for 1085 series, white



GE Security

503-885-5700
888-GE-SECURITY
(437-3287)
faxback 800-483-2495
email info@gesecurity.com
www.gesecurity.com

Asia
tel 852-2907-8108
fax 852-2142-5063
Australia
tel +61-3-9259-4700
fax +61-3-9259-4799

Europe
tel +44-113-238-1668
fax +44-113-253-8121
Latin America
tel 305-267-4301
fax 305-267-4300